

# Photovoltaic Module Monocrystalline

## MEGS-65M MEGS-70M MEGS-75M



### Quality and Safety

- \*Rigorous quality control meeting the highest international standards
- \*High-transmissivity low-iron tempered glass, strong aluminium frame Using UV-resistant silicon
- \*Safety Class II,conformity to CE

### Features

- \*Aesthetic appearance with excellent efficiency based on innovative photovoltaic technologies
- \*High quality,strong aluminium frame,passing mechanical load testing 5400 Pa and wind pressure 2400Pa

### Warranties

- \*10 years limited product warranty
- \*15 years at90% of the minimal rated power output
- \*25 years at80% of the minimal rated power output

### Certificates





### Electrical Characteristics

Model	MEGS-65M	MEGS-70M	MEGS-75M
Maximum Power at STC (P <sub>max</sub> )	65W	70W	75W
Optimum Operating Voltage (V <sub>mp</sub> )	17.4V	17.6V	17.6V
Optimum Operating Current (I <sub>mp</sub> )	3.736A	3.978A	4.262A
Open-Circuit Voltage (V <sub>oc</sub> )	22.1V	22.2V	22.2V
Short-Circuit Current (I <sub>sc</sub> )	3.974A	4.204A	4.565A
Solar Cell Efficiency (%)	15.4	16.5	17.7
Solar Module Efficiency (%)	12.5	13.5	14.4
Operating Temperature	-40to85°C		
Maximum System Voltage	DC1000		
Maximum Series Fuse Rating	15A		
Power Tolerance	+/-3%		
STC:Irradiance 1000W/m <sup>2</sup> ,Modules Temperature 25°C,AM=1.5			




## Engineering Drawings

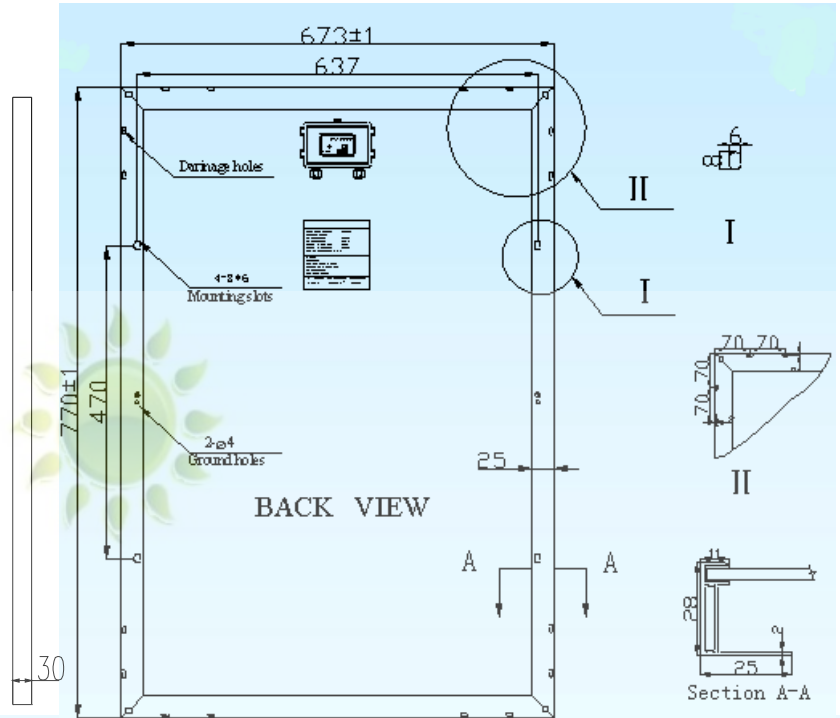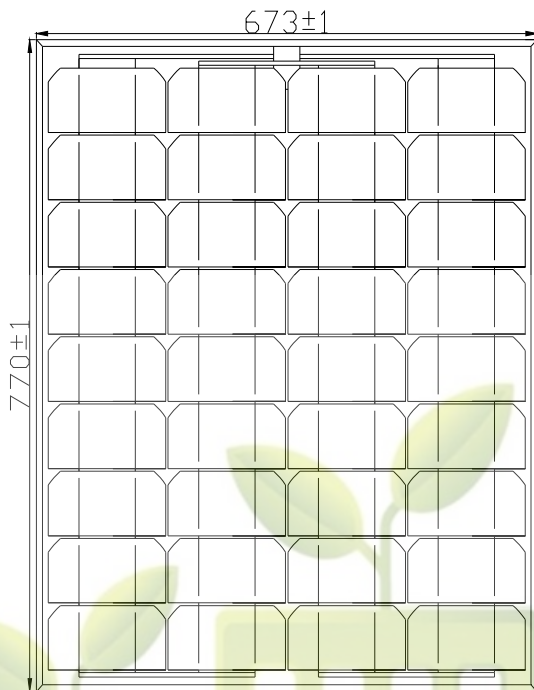

## Mechanical Characteristics

Solar cell	Mono-Crystalline 156*78mm
No. of cells	36 (4*9)
Dimensions	770mm*673mm*30mm
Weight	6.2kg
Front glass	3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction box	PV-LH0808
Connector	/
Output cables	/
1*20'	/
1*40'	/
1*40'HQ	/

## IV-Curves

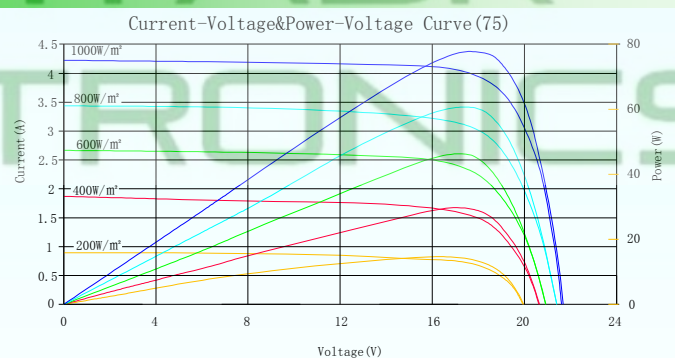

## Temperature Coefficient

Nominal Operating Cell Temperature (NOCT)	47°C ± 2°C
Temperature Coefficient of Pmax	-0.47%/K
Temperature Coefficient of VOC	-0.346%/K
Temperature Coefficient of ISC	+0.036%/K

